
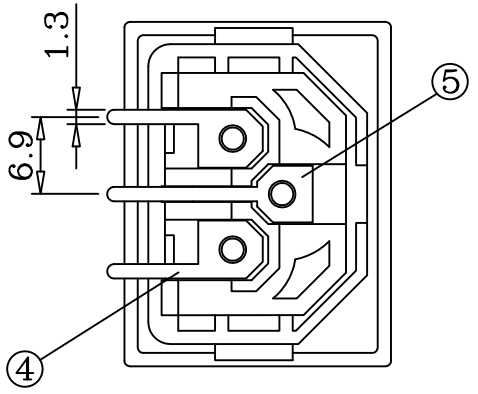


XX	X
1.0	1.2
1.5	1.7
2.0	2.2
2.0	2.2

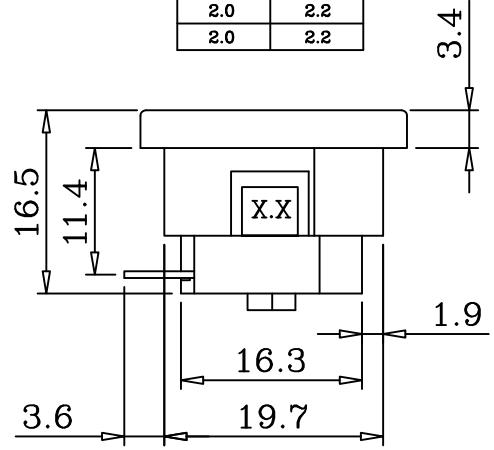

規格
Specifications

- 額定
 1. Rating: 2.5A 250V~
 絕緣電阻
 2. Insulation Resistance: >100MΩ at 500VDC
 耐壓強度
 3. Dielectric Strength: AC 2000V 1Minute.
 操作強度
 4. Operating Temperature: -25° C TO +85° C (Max.)
 焊接
 5. Soldering: 280° For 3Ses.
 插拔力
 6. Forces Necessary to Insert and to Withdraw The Connector: 1Kg~5Kg

認可安規
 7. Safety:

5	Terminal	1	Bsp1-1/2H	t=0.6	Sn-plated	Q307-03D
4	Terminal	2	Bsp1-1/2H	t=0.6	Sn-plated	Q307-02D
3	Mandrel	1	Bsp1-1/2H	ø3.15	Tin-plated	Q307-03F
2	Mandrel	2	Bsp1-1/2H	ø2.35	Tin-plated	Q201-020
1	Body	1	Nylon#66			Q307-01B

編號	零件名稱	數量	材質	規格	加工處理	備註
設計	James Chen	102	7	2	品名 承認圖 品號 JR-307SB1(PCB)(1.0,1.5,2.0) 圖號 A307-00M	無註記公差 長度 ±0.3 角度 第三角法 單位 mm
製圖	James Chen	102	7	2		
描圖	James Chen	102	7	2		
校對						
核准						

請勿實測圖面