


MATERIALS

1. HOUSING: Nylon #66 UL 94V-2
2. ROCKER: Nylon #66 UL 94V-2
3. TERMINAL: Copper Alloy Ag plated
4. CONTACTOR: AgSnO₂In₂O₃(10)/Cu

SPECIFICATION

1. RATING: 16(4)A 250VAC T125/55
10(2)A 250VAC 5E4
ENEC SEMKO
2. CIRCUIT: ON-OFF DPST 4P
3. CONTACT RESISTANCE: 30m OHMS Max
4. INSULATION RESISTANCE: DC500V 100M OHMS Min
5. WITHSTAND VOLTAGE: AC 1500V 1 Minute
6. ELECTRICAL LIFE: 10000 Cycles at Full Load
7. OPERATION FORCE: 1000~1400gf
8. OPERATION TEMPERATURE RANGE: -25~+125° C

PANEL HOLE SIZE

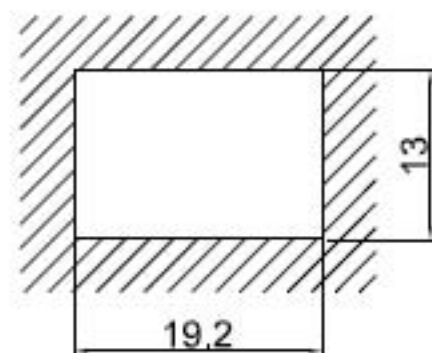


捷森電子工業股份有
限公司

RL5-6

TITLE

PUSH SWITCH

VIEW TYPE



SERIES

RL5-6

FUNCTION

ON-OFF

DRAWING NUMBER