


MATERIALS

1. HOUSING: Nylon #66 UL 94V-2
2. ROCKER: Nylon #66 UL 94V-2
3. TERMINAL: Copper Alloy Sn or Ag plated
4. CONTACTOR: AgSnO₂In₂O₃ (10)/Cu

SPECIFICATION

1. RATING: 16A 125/250VAC UL C-UL
16(8)A 250VAC T85/55 1E4
ENEC SEMKO
2. CIRCUIT: ON-OFF W/Lamp DPST 4P
3. CONTACT RESISTANCE: 30m OHMS Max
4. INSULATION RESISTANCE: DC500V 100M OHMS Min
5. WITHSTAND VOLTAGE: AC 1500V 1 Minute
6. ELECTRICAL LIFE: 10000 Cycles at Full Load
7. OPERATION FORCE: 1000~1500gf
8. OPERATION TEMPERATURE RANGE: -25~+85° C

PANEL HOLE SIZE

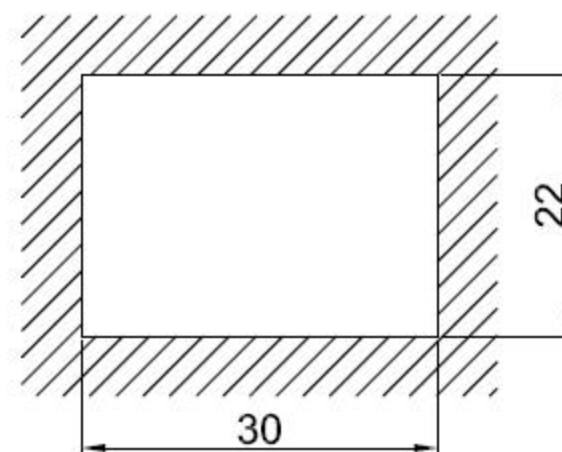

捷森電子工業股份有限公司						RL2(P)-AL	
						TITLE	ROCKER SWITCH
设计	签名	年月日	标准化	签名	年月日	FUNCTION	ON-OFF W/Lamp
绘图	夏雄庚	10.12.09				DRAWING NUMBER	
审核	张仁阳						
工艺			批准				
						VIEWS TYPE 	