

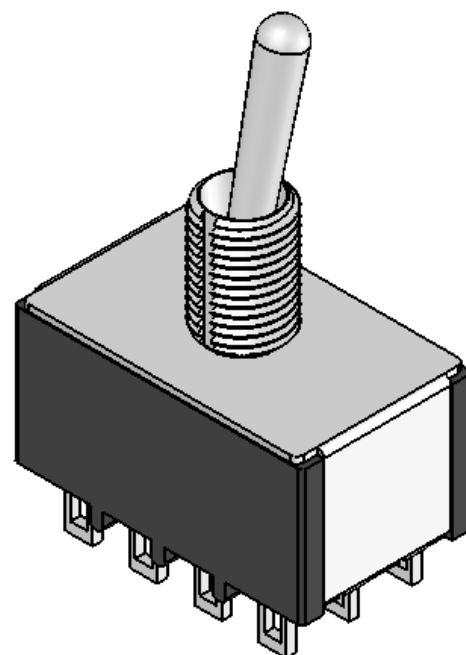
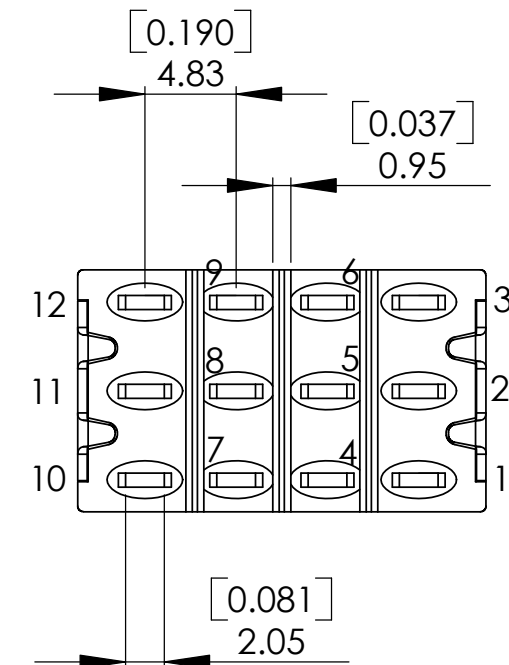
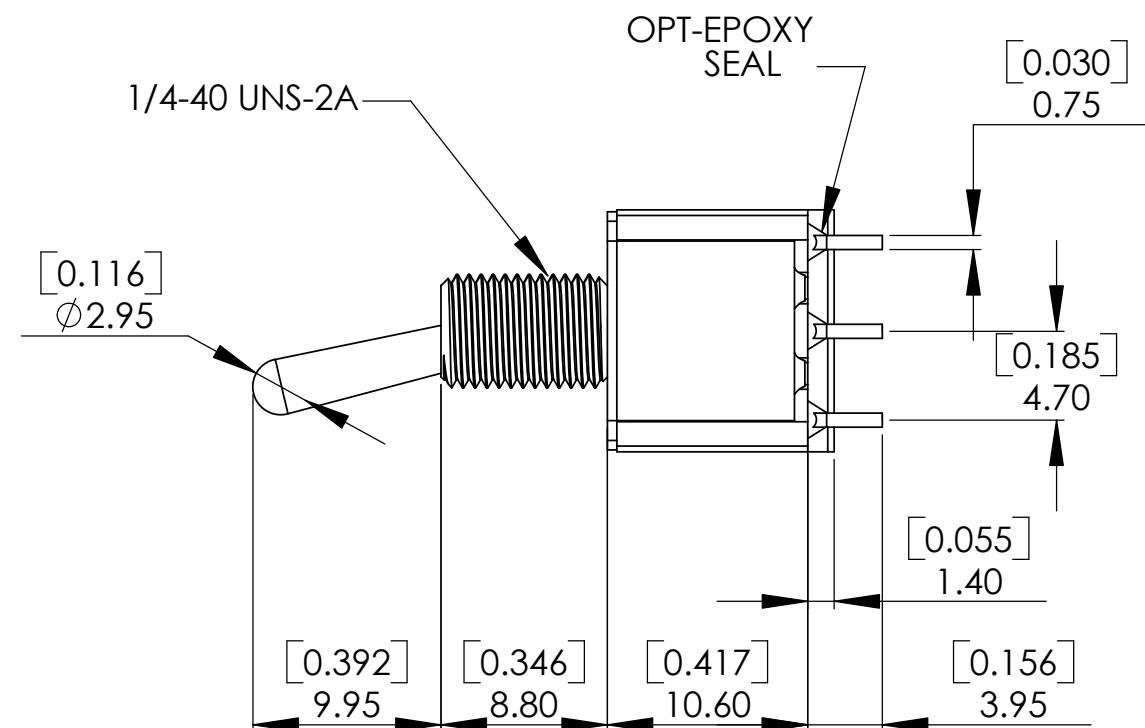


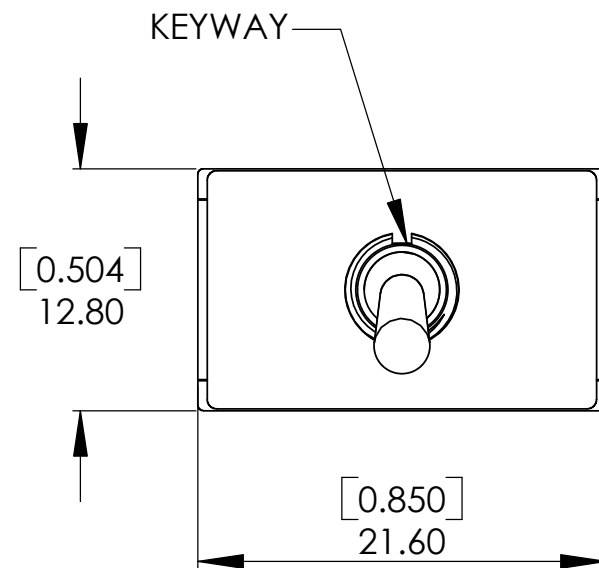

Schematic

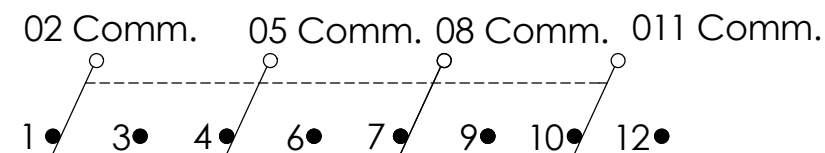

Model No.	Switching Position		
B	ON	NONE	ON
F	ON	NONE	(ON)
C	ON	OFF	ON
G	(ON)	OFF	(ON)
H	ON	OFF	(ON)
Term Comm.	2-3,5-6 8-9,11-12	2-3,5-4 8-9,11-10	2-1,5-4 8-7,11-10

SPECIFICATIONS:

CONTACT RATING : 5 AMPS @ 120 V AC or 28 V DC.
 2 AMPS @ 250 V AC or 0.4VA AMPS @20 V AC or DC.
 ELECTRICAL LIFE : 6,000 make-and-break cycles at full load.
 CONTACT RESISTANCE : 10 mΩ max. initial @ 2-4 V DC.
 100 mA, for both silver and gold plated contacts.
 INSULATION RESISTANCE : 1,000 MΩ min.
 DIELECTRIC STRENGTH : 1,000 V RMS @ sea level.
 OPERATING TEMPERATURE : -30 °C to 130 °C

MATERIALS:

CASE : Diallyl phthalate (DAP)(UL-94V-0).
 ACTUATOR : ZINC ALLOY.
 BUSHING : ZINC ALLOY.
 HOUSING : Stainless steel.
 TERMINAL/CONTACT : Brass, with silver or gold plated.
 or gold over silver.
 SWITCH SUPPORT : Brass, tin plated.

捷森電子工業股份有限公司 JACKSON ELECTRONICS IND. CORP.				TOLERANCE
				XX. ± 0.5
				X. ± 0.2
ITEM NO	JS-524	DATA		.X ± 0.2
CHECKED BY		DRAWN BY		.XX ± 0.2