



JACKSON ELECTRONICS IND. CORP.

捷森電子工業股份有限公司

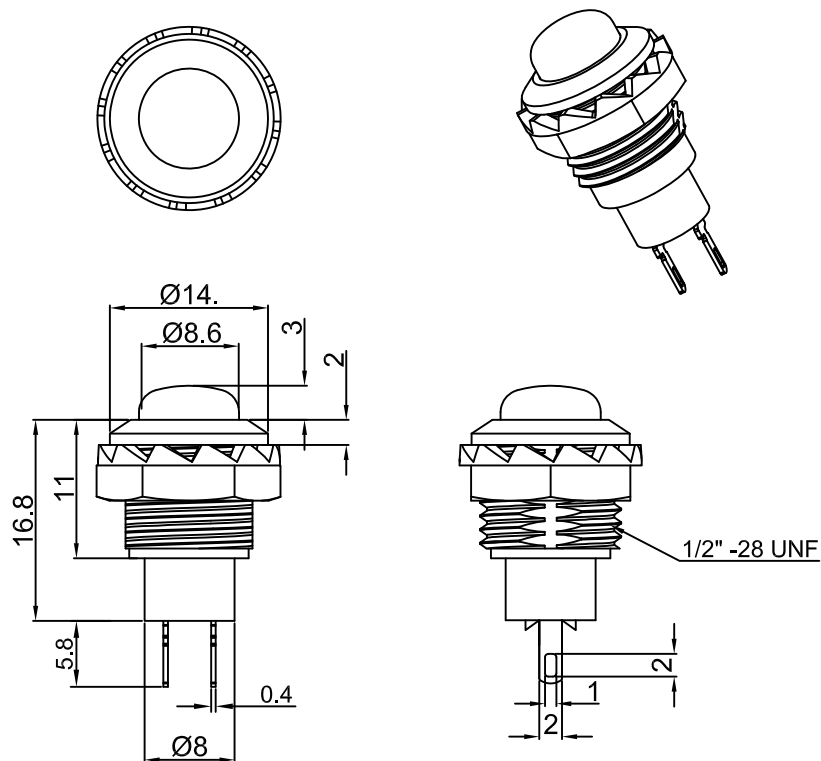

Rating: 3A 125V AC ;
1.5A 250V AC ;
Contact Resistance: 50mΩ Max. ;
Insulation Resistance:DC 500V 100MΩ Min. ;
Dielectric Strength:AC 1000V 1 minute
Total Travel: 2.0±0.4mm
Operating Force:150±100gf
Operating Life:10,000 cycles
Machanical Life:50,000 cycles Min.;
Operating Temperature:0°C~85°C
Function: OFF-(ON)

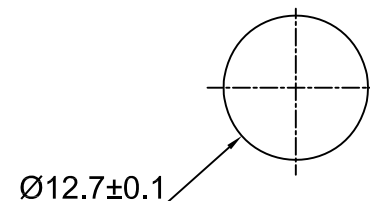

Panel Thinkness: 3mm MAX.

MATERIAL

Base:PA66 UL rated :94V-2

Cover:ABS

Terminal: Copper,silver or tin plated

Nut: Brass,Ni plated

CUT-OUT

Y	Yellow 黄色
W	White 白色
U	Blue 蓝色
R	Red 红色
O	Orange 橙色
G	Green 绿色
B	Black 黑色
A	Gray 灰色
CAP COLOR (X)	

				公差 TOLEANCES				.X± 0.3 .XX± 0.15 角度 ANGLE± 1°		单位 DIMENSION UNIT mm.		
A2	端子结构变更	2011.07.22	ECN11024	版本	A2	比例尺	NONE	日期	2011.07.22	品名	TITLE	图号
A1	图纸重新整理发行	2009.04.16	N/A	VERSION		SCALE		DATE		JS-706A-(B)		DRAWING NO
A0	New Issue	2008.07.08	N/A	核准		核对		绘图				JS-706A-(B)
版本 VER	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY	黎夏			