



捷森電子工業股份有限公司
JACKSON ELECTRONICS IND. CORP.



Rating: 6A 125V AC ;
3A 250V AC ;

Contact Resistance: 20mΩ Max. ;

Insulation Resistance:DC 500V 100MΩ Min. ;

Dielectric Strength:AC 1000V 1 minute

Total Travel: 2.0±0.3mm

Operating Force:300±50gf

Mechanical Life: Over 30,000 cycles





Electrical Life: Over 10,000 cycles

Operating Temperature:-20°C~+70°C

Soldering Temperature:256°C for 5 Seconds

Function: OFF-(ON)

Welding method:Manual Soldering (350 ° C±5 ° C,3s±0.5s)

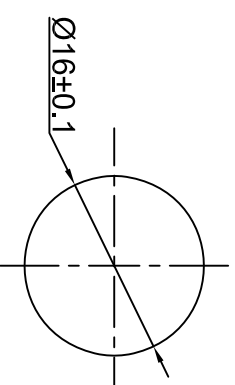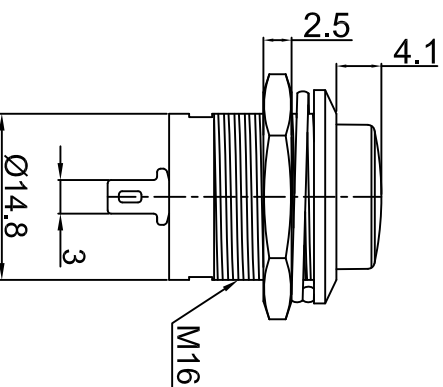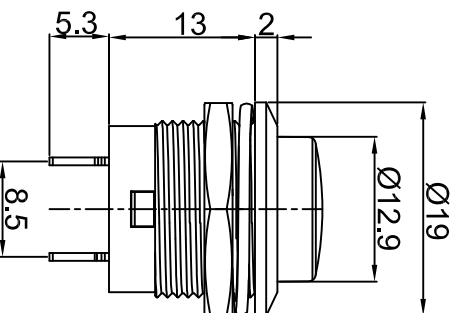

Panel Thickness: 3mm MAX.

MATERIAL:

Base: PA66, UL rated:94V-2 Min. ;

Cap: ABS ;

Terminal: Copper, Silver or Tin plated ;

Nut: Brass, Ni plated .

CUT-OUT

Y	Yellow	黄色
W	White	白色
U	Blue	蓝色
R	Red	红色
O	Orange	橙色
G	Green	绿色
B	Black	黑色
A	Gray	灰色
CAP COLOR (X)		

公差 TOLERANCES				.X± 0.3 .XX± 0.15 角度 ANGLE± 1°				单位 DIMENSION UNIT		mm.	
图面整理更新	2019.04.17	N/A	视角	比例尺	日期	品名	图号	TITLE		DRAWING NO	
重新整理	2016.12.11	N/A	VIEWING ANGLE	SCALE	DATE						
New Issue	2011.12.01	N/A	核准	核对	Sinc						
变更说明	CHANGE DESCRIPTION	ECN NO.	APPROVED BY	CHECKED BY	DRAWN BY						
版本 VER			Richard		姜庆勇						