







1. Electrical rating: 1A 125V AC / 0.5A 250V AC
2. Circuit: 2P (SPST)
3. Function: PUSH ON-OFF
4. Contact Resistance: 2.5V DC 10mΩ or less
5. Insulation Resistance: 500V DC 100MΩ or More
6. Voltage Breakdown: 1000V AC 1min
7. Electrical life: 10000 cycles
8. Temperture rise at the terminal: Max. 30℃
9. Solder ability of terminal: Max. 300℃ 3 Sec
10. Mtg. Hole Dial mm: 7∅ mm



Button Color
Black
White

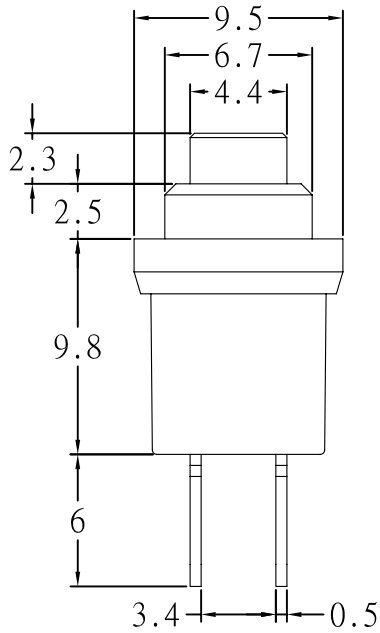


Installation



Top View

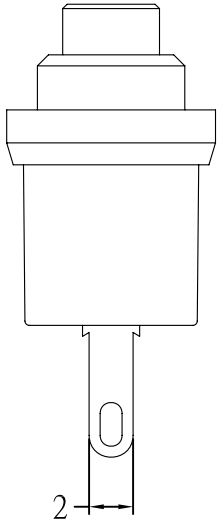

Bottom View



捷森電子工業股份有限公司 JACKSON ELECTRONICS IND. CORP.	SCALE	3:1	DIM	mm
	DWN.BY	H.R.S.	DATE	2008-3-10
	CHK.BY		APP.BY	
	DWG.NO.			JS-746A
	PAGE			1/1