

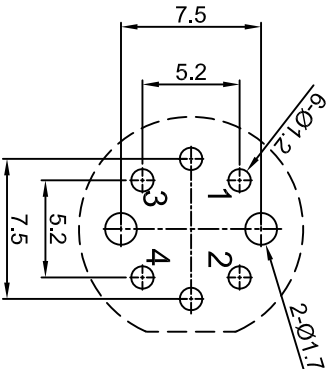
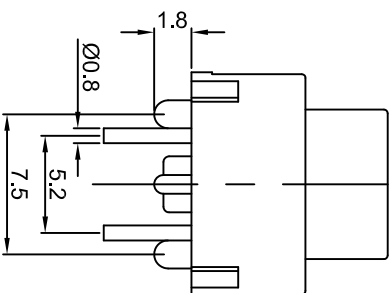
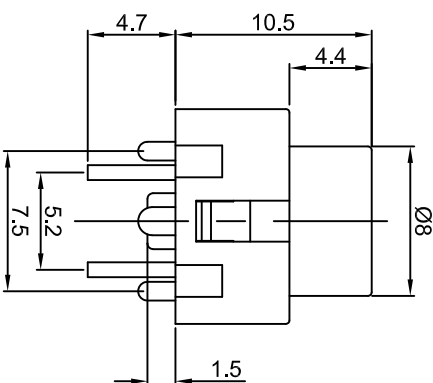



TS4




CIRCUIT

- Specifications
- Circuit : SPST
 - Current rating : 30mA
 - Voltage rating : 30VDC
 - Dielectric withstanding voltage : 500VAC for 1 minute
 - Contact resistance : 30mΩ Max. (Initial)
 - Insulation resistance : 100MΩ Min
 - Operating force : 300±50gf
 - Total travel : 0.7mm±0.2mm
 - Operating life : 100,000 cycles Min.
 - Solder specifications : 260±5° C for 5 seconds
 - Operating temperature : -20° C ~ +60° C
 - Welding method : Manual Soldering (350° C±5° C, 3s±0.5s)

MATERIAL:

Frame:Nylon66, UL rated:94V-2 Min. ;
Cap:ABS;
Terminal:Brass,Gold or Tin plated.

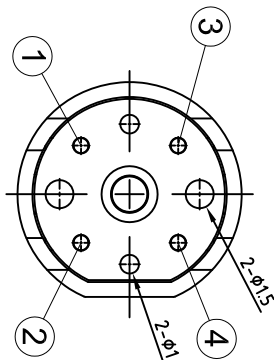

Y	Yellow	黄色
W	White	白色
U	Blue	蓝色
R	Red	红色
O	Orange	橙色
G	Green	绿色
B	Black	黑色
A	Gray	灰色
CAP COLOR (X)		

公差 TOLERANCES			角度 ANGLE ± 1°			單位 DIMENSION UNIT		mm.	
A2	重新整理	2016.12.12	N/A	视角	比例尺	1:1	日期	2016.12.12	品名 TITLE
A1	重新整理	2016.07.02	N/A	VIEWING ANGLE	SCALE		DATE		DRAWING NO
A0	发行	2011.12.01	N/A	核准	核对	Sinc	绘图		
版本 VER.	变更说明	CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY	Richard	CHECKED BY	P.W.RAO	JS-763A(B)