




Switch Name	Button Switch		Type	JS-758A-L2-T(JEC)
1. Function				
1.1 Rating	10A 250V / 16A 125V		1.2 Temperature	T85
1.3 Contact resistance	Resistance tested at 1A, 5VDC, Voltage drop method.			
1.4 Insulation resistance	Resistance between terminal and terminal, terminal and shell $\geq 100M\Omega$ , at			
1.5 Dielectric strength	Voltage between terminal and terminal, terminal and shell 3000VAC. No break for 1S.			
1.6 Connect the line carry Strength	Termerianl to flex but without mechnial and electrical damage with force at 10N from any direction for 10S.			
1.7 Welding Heat	No mechanical damage for $5 \pm 0.5$ S at tempprature $350 \pm 5^\circ C$			
1.8 Welding capability	90% to be immerged for $2 \pm 0.5$ S at tempprature $235 \pm 5^\circ C$			
1.9 Contact Pressure	$\geq 40g$ .			

## 2. Size

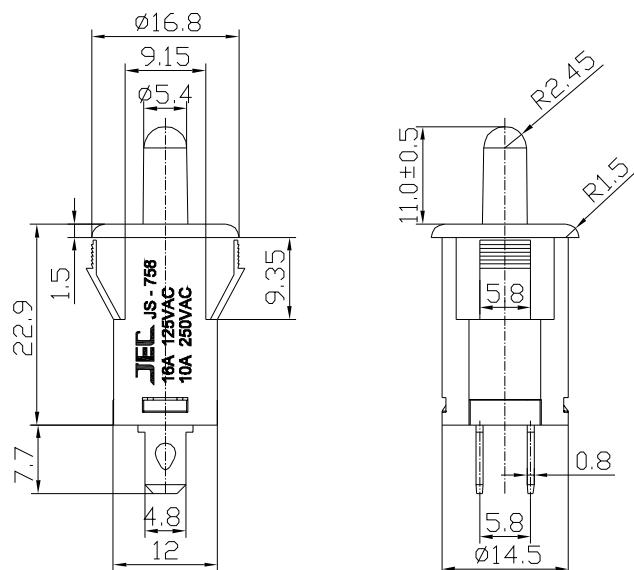

PANEL CUT OUT



REV.	CHANGE ORDER			Date	
				ECN	
File NO.				REV.	Tolerance $\pm 0.2$
File Name	SPECIFICATION			Units	mm
Edit	Guo fu sheng	Check	Wei you wen	Approved	Date of issue 2019.06.01