
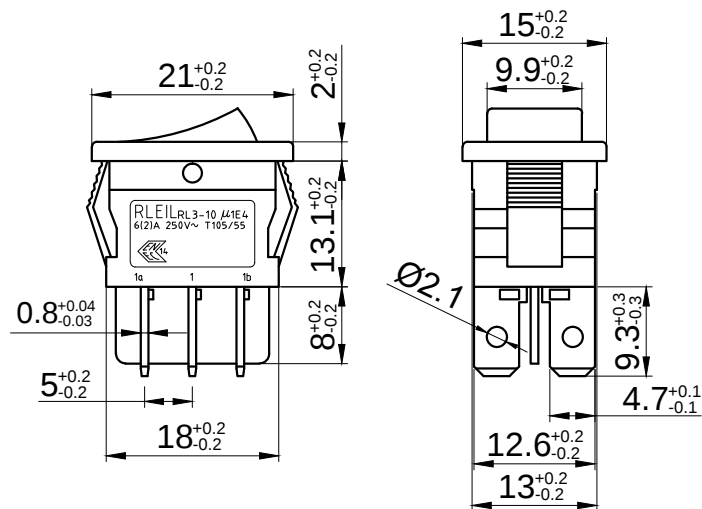


CIRCUIT DIAGRAM



MATERIALS


1. HOUSING:Nylon #66 UL 94V-2
2. ROCKER:Nylon #66 UL 94V-2
3. TERMINAL:Copper Alloy Ag plated
4. CONTACTOR:AgSnO₂In₂O₃ (10)/Cu

SPECIFICATION

1. RATING:UL C-UL:10A 125VAC T105
ENEC :
6(2)A 250VAC T125/55 1E4
2. CIRCUIT:ON-ON DPDT 6P
3. CONTACT RESISTANCE:30M OHMS Max
4. INSULATION RESISTANCE:DC500V 100M OHMS Min
5. WITHSTAND VOLTAGE:AC 1500V 1 Minute
6. ELECTRICAL LIFE:10000 Cycles at Full Load
7. OPERATION FORCE:400~900gf
8. OPERATION TEMPERATURE RANGE:-25~+125° C
9. MECHANICAL LIFE:100000 Cycles

PANEL HOLE SIZE

Panel thickness	X
0.75-1.25	19.2
1.25-2.0	19.4
2.0-3.0	19.6

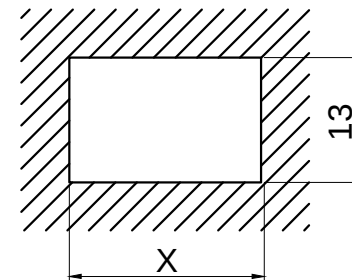

JACKSON ELECTRONICS IND. CORP. 捷森電子工業股份有限公司						JS-606Q-B2-B/B-1	
设计	签名	年月日	标准化	签名	年月日	ROCKER SWITCH	SERIES RL3-10
	绘图	符辉	21.04.21				FUNCTION ON-ON
	审核	张雪飞					DRAWING NUMBER
	工艺			批准			
VIEWS TYPE							