


## SPECIFICATION

- RATING: UL C-UL:10A 125VAC T105  
ENEC SEMKO:  
6(2)A 250VAC T125/55 1E4
- CIRCUIT:ON-OFF-ON DPDT 6P
- CONTACT RESISTANCE:30m OHMS Max
- INSULATION RESISTANCE:DC500V 100M OHMS Min
- WITHSTAND VOLTAGE:AC 1500V 1 Minute
- ELECTRICAL LIFE:10000 Cycles at Full Load
- OPERATION FORCE:650~950gf
- OPERATION TEMPERATURE RANGE:-25~+125° C

## PANEL HOLE SIZE

Panel thickness	X
0.75-1.25	22.2
1.25-2.0	22.4
2.0-3.0	22.6

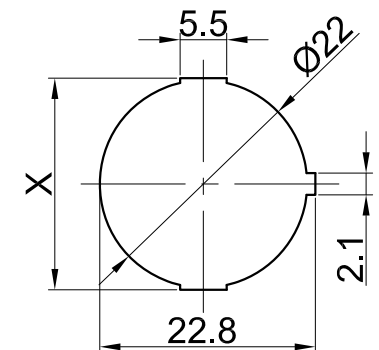

## MATERIALS

- HOUSING:Nylon #66 UL 94V-2
- ROCKER:Nylon #66 UL 94V-2
- TERMINAL:Copper Alloy Ag plated
- CONTACTOR:AgSnO<sub>2</sub>In<sub>2</sub>O<sub>3</sub>(10)/Cu

JACKSON ELECTRONICS IND. CORP.  
捷森電子工業股份有限公司

设计	签名	年月日	标准化	签名	年月日
绘图	符辉	16.11.13			
审核	张雪飞				
工艺			批准		

RL3-5X-C-BB-6

TITLE  
ROCKER SWITCH

SERIES  
RL3-5 (X)  
FUNCTION  
ON-OFF-ON



DRAWING NUMBER