





Panel thickness	X
0.75-1.25	19.2
1.25-2.0	19.4
2.0-3.0	19.6



PANEL HOLE SIZE

規格 SPECIFICATIONS:

- | | |
|------------------------------------|------------------------------|
| 1. 回路
CIRCUIT : | SPST ON-OFF 2P |
| 2. 額定値
RATING : | 10A 125VAC / 6A 250VAC |
| 3. 接觸電阻
CONTACT RESISTANCE : | 30m Ω (Max) |
| 4. 絶縁電阻
INSULATION RESISTANCE : | DC 500V 100M Ω (Min) |
| 5. 耐電壓
WITHSTAND VOLTAGE : | AC 2000V 1 Minute |
| 6. 電氣壽命
ELECTRICAL LIFE | 10,000 Cycles At Full Load . |
| 7. 作動力
OPERATION FORCE | 800±300 g |
| 8. 使用溫度範圍
OPERATING TEMPERATURE | -25°C~+85°C . |
| 9. 焊 接
SOLDERING | 280°C FOR 3 Sec . |
| 10. 防護等級
LEVEL OF PROTECTION | IP65 |

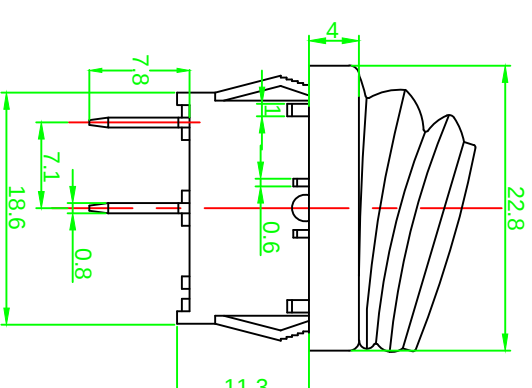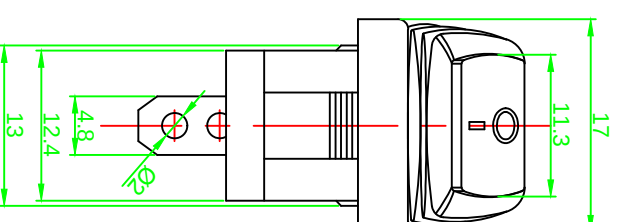

	第三角法	公差 無註記	品名	JS-606系列承認圖	品號	JS-606A(P)-Q/B/B-3H	比例	單位	MM							
			計量	Johnson chen	114 02 17	製圖	LEO ZHENG	114 02 17	校對	LEO ZHENG	114 02 17	核准	Davy Chen	114 02 17	採購規範	