


CURRENT LEVEL (% OF RATED)

100%
150%
200%
300%
400%
500%
600%

TRIP TIME

NO TRIP
TRIP IN 1 HOUR
3.5~60 SEC.
0.7~10 SEC.
0.35~5.0 SEC.
0.2~2.8 SEC.
0.1~1.8 SEC.

(Ambient Temperature at 25°C)

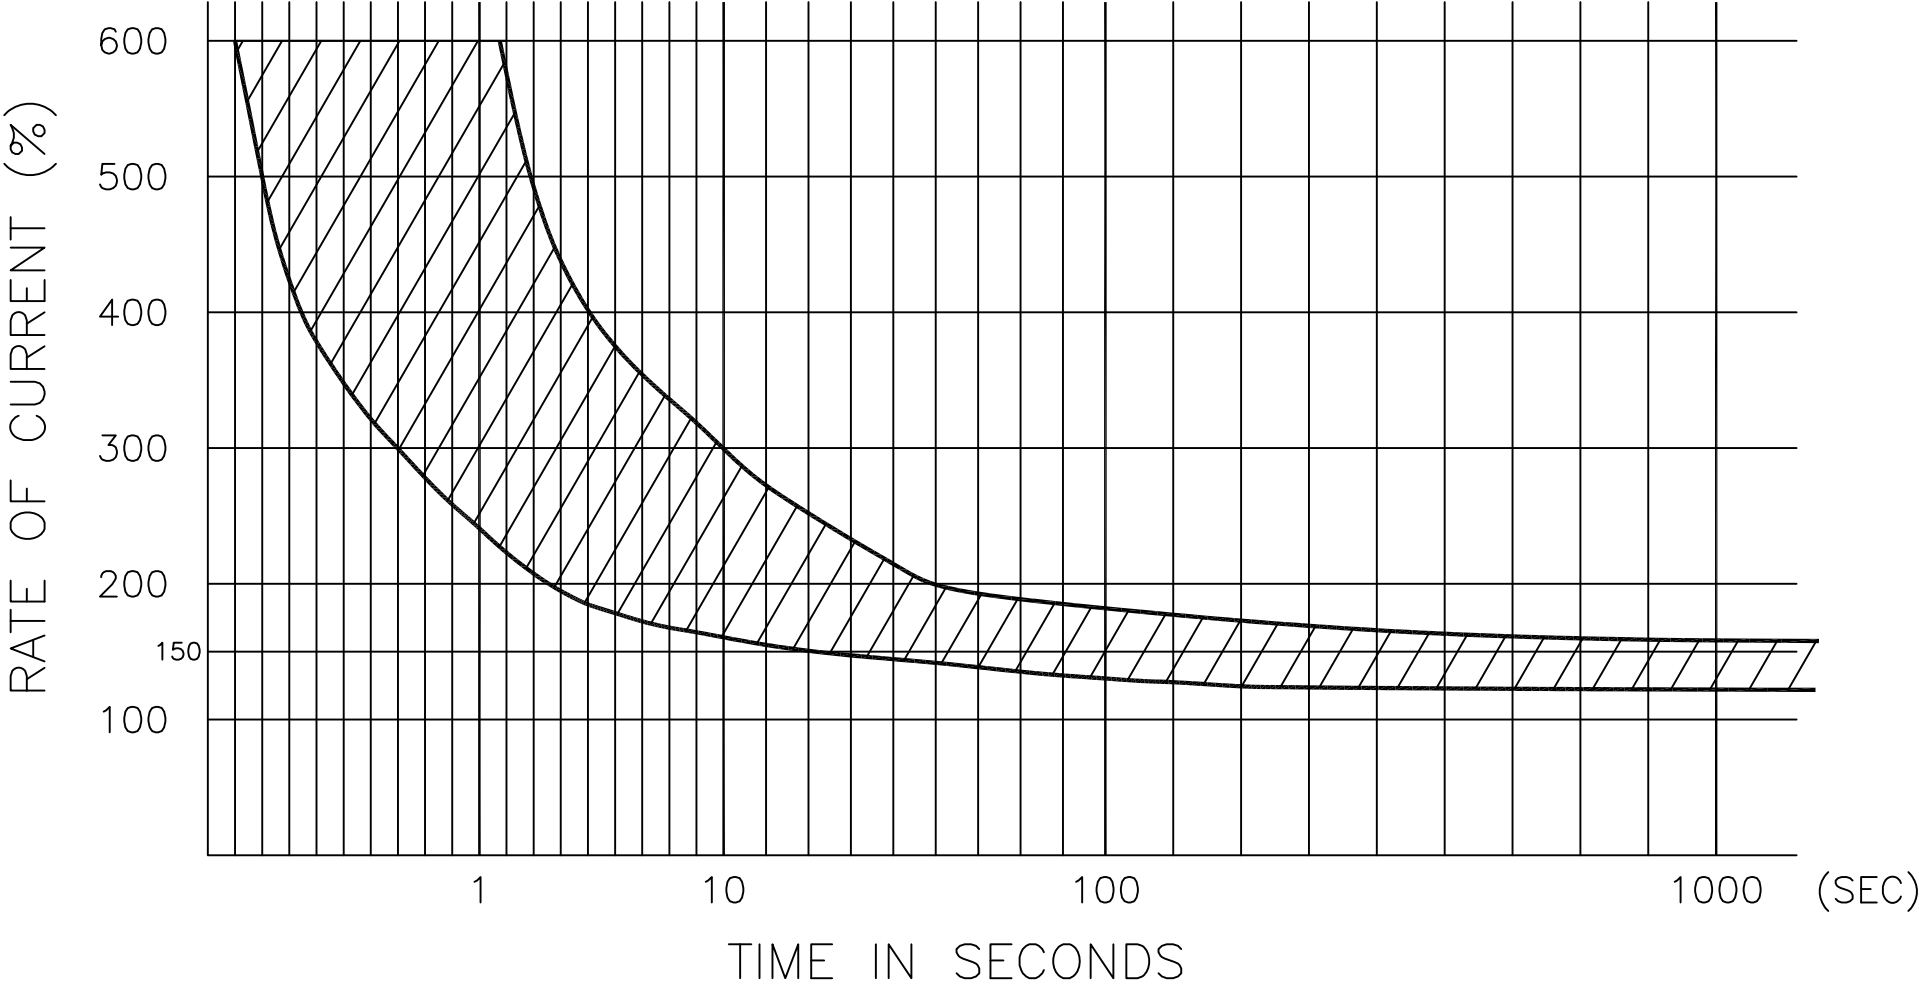

QVNU2.E152074
Protectors, Supplementary - Component

Page Bottom

Protectors, Supplementary - Component

See General Information for Protectors, Supplementary - Component

APPROACH TECHNOLOGY INC

E152074

3RD FL
209 COUNTY BLVD, SEC 3
PAN CHIAO
NEW TAIPEI, 220 TAIWAN

Cat. No.	Type	UG	FW	Max V	Max Amps	TC	OL	SC	Operation
SS-001 Series, Model SS-001C	OC	C	0	125	20	2	1	1.0 kA,C1	Trip-free, cycling
SS-001 Series, Model SS-001T	OC	C	0	125	20	2	1	1.0 kA,C1	Trip-free
SS-002 Series, Models SS-002T, BS-001	OC	C	0	125 AC	4-15	2	1	1.0 kA,C1	Trip-free
		C	0	32 DC	4-15	2	0	1.0 kA,C1	Trip-free
SS-002 Series, Model SS-002C	OC	C	0	125	4-15	2	1	1.0 kA,C1	Trip-free, cycling
		C	0	32 DC	4-15	2	0	1.0 kA,C1	Trip-free, cycling
SS-003	OC	A,B,D	0	125	15	2	1	1.0kA,U1	Trip-free, cycling
SS-006	OC	A	0	125	15	2	1	1.0kA, C1	Trip-free
SS-011	OC	A	0	125	16	1	0	1.0kA, U1	Trip-free, cycling
SS-003	OC	A, B, C, D	0	125 AC	3-15 A	2	1	1.0 kA, U1	Trip-free, cycling
		A, B, C, D	0	250 AC	3-15 A	2	1	1.0 kA, U1	Trip-free, cycling
		A, B, C, D	0	32 DC	3-15 A	2	0	1.0 kA, C1	Trip-free, cycling
SS-009	OC	A, B, C, D	0	125AC	5-20 A	2	1	1.0 kA, C1	Trip-free, cycling
		A, B, C, D	0	250AC	5-20 A	2	1	1.0 kA, C1	Trip-free, cycling
		A, B, C, D	0	32 DC	5-16 A	2	0	1.0 kA, C1	Trip-free, cycling
BC01, BC11, BC21	OC	B, D	0	125 AC	0.5-4.5 A	2, 3	1	1.0 kA, U1	Trip-free, cycling
		B, D	0	250 AC	0.5-4.5 A	2, 3	1	1.0 kA, U1	Trip-free, cycling
		B, D	0	50 DC	0.5-4.5 A	2, 3	1	1.0 kA, U1	Trip-free, cycling
BC00, BC10, BC20	OC	A, B, C, D	0	125AC	5-40 A	2, 3	1	1.0 kA, U1	Trip-free, cycling
		A, B, C, D	0	250 AC	5-40 A	2, 3	1	1.0 kA, U1	Trip-free, cycling
		A, B, C, D	0	125 AC	10-35 A	2, 3	1	400 A, U3	Trip-free, cycling
		A, B, C, D	0	250 AC	10-35 A	2, 3	1	400 A, U3	Trip-free, cycling
		A, B, C, D	0	50 DC	5-40 A	2, 3	1	1.0 kA, U1	Trip-free, cycling
BC08, BC18, BC28	OC	B, D	0	250 AC	40-50 A	2, 3	0	1.0 kA, U1	Trip-free, cycling
		B, D	0	125 AC	40-70 A	2, 3	0	1.0 kA, U1	Trip-free, cycling
		B, D	0	50 DC	40-50 A	2, 3	0	1.0 kA, U1	Trip-free, cycling
BD00, BD10, BD20	OC	A, B, D	0	125 AC	3-20 A	2, 3	1	2.0 kA, C1	Trip-free, cycling
		B, D	0	250 AC	3-20 A	2, 3	1	1.0 kA, C1	Trip-free, cycling
		A, B, D	0	50 DC	3-20 A	2, 3	1	1.0 kA, U1	Trip-free, cycling
SS-001-T	OC	A, B, D	0	125 AC	2-20 A	2	1	2.0 kA, C1	Trip-free
	OC	B, D	0	250 AC	2-20 A	2	1	1.0 kA, C1	Trip-free
	OC	A, B, D	0	32 DC	3-16 A	2	0	1.0 kA, C1	Trip-free
SS-001-C, SS-001R	OC	A, B, D	0	125 AC	2-20 A	2	1	2.0 kA, C1	Trip-free, cycling
	OC	B, D	0	250 AC	2-20 A	2	1	1.0 kA, C1	Trip-free, cycling
	OC	A, B, D	0	32 DC	3-16 A	2	0	1.0 kA, C1	Trip-free, cycling
SS-005	OC	A, B, C, D	0	125 AC	4-20 A	2	1	1.0 kA, C1	Trip-free, cycling
	OC	A, B, C, D	0	250 AC	4-20 A	2	1	1.0 kA, C1	Trip-free, cycling
	OC	A, B, C, D	0	50 DC	4-20 A	2	1	1.0 kA, C1	Trip-free, cycling
SS-006	OC	A, B, D	0	125 AC	4-16 A	2	1	1.0 kA, C1	Trip-free
	OC	B, D	0	250 AC	4-16 A	2	1	1.0 kA, C1	Trip-free
	OC	A, B, D	0	32 DC	4-16 A	2	0	1.0 kA, C1	Trip-free
SS-007	OC	A, B, D	0	125 ac	3-20	2	1	1kA, C1	Trip-free, cycling
	OC	B, D	0	250 ac	3-20	2	1	1kA, C1	Trip-free, cycling
	OC	A, B, D	0	32 dc	3-20	2	0	1kA, C1	Trip-free, cycling

Marking: Company name and catalog designation.
Last Updated on 2015-06-05

[Questions?](#)

[Print this page.](#)

[Terms of Use](#)

[Page Top](#)

© 2017 UL LLC

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2017 UL LLC".

QVNU8.E152074
Protectors, Supplementary Certified for Canada - Component

[Page Bottom](#)

Protectors, Supplementary Certified for Canada - Component

[See General Information for Protectors, Supplementary Certified for Canada - Component](#)

APPROACH TECHNOLOGY INC

E152074

3RD FL
 209 COUNTY BLVD, SEC 3
 PAN CHIAO
 NEW TAIPEI, 220 TAIWAN

Cat. No.	Type	UG	FW	Max V	Max Amps	TC	OL	SC
SS-001 Series, Models SS-001, SS-001T	OC	C	0	125	20	2	1	1.0 kA, C1
SS-002 Series, Models SS-002C, SS-002T, BS001	OC	C	0	125 AC	4-15	2	1	1.0 kA, C1
		C	0	32 DC	4-15	2	0	1.0 kA, C1
SS-003	OC	A, B, D	0	125	15	2	1	1.0kA, U1
SS-006	OC	A	0	125	15	2	1	1.0kA, C1
SS-011	OC	A	0	125	16	1	0	1.0kA, U1
SS-003	OC	A, B, C, D	0	125AC	3-15 A	2	1	1.0 kA, U1
		A, B, C, D	0	250 AC	3-15 A	2	1	1.0 kA, U1
		A, B, C, D	0	32 DC	3-15 A	2	0	1.0 kA, U1
SS-009	OC	A, B, C, D	0	125AC	5-20 A	2	1	1.0 kA, C1
		A, B, C, D	0	250AC	5-20 A	2	1	1.0 kA, C1
		A, B, C, D	0	32 DC	5-16 A	2	0	1.0 kA, U1
BC01, BC11, BC21	OC	B, D	0	125AC	0.5-4.5 A	2, 3	1	1.0 kA, U1
		B, D	0	250 AC	0.5-4.5 A	2, 3	1	1.0 kA, U1
		B, D	0	50 DC	0.5-4.5 A	2, 3	1	1.0 kA, U1
BC00, BC10, BC20	OC	A, B, C, D	0	125AC	5-40 A	2, 3	1	1.0 kA, U1
		A, B, C, D	0	250 AC	5-40 A	2, 3	1	1.0 kA, U1
		A, B, C, D	0	125 AC	10-35 A	2, 3	1	400 A, U3
		A, B, C, D	0	250 AC	10-35 A	2, 3	1	400 A, U3
		A, B, C, D	0	50 DC	5-40 A	2, 3	1	1.0 kA, U1
BC08, BC18, BC28	OC	B, D	0	250 AC	40-50 A	2, 3	0	1.0 kA, U1
		B, D	0	125 AC	40-70 A	2, 3	0	1.0 kA, U1
		B, D	0	50 DC	40-50 A	2, 3	0	1.0 kA, U1
BD00, BD10, BD20	OC	A, B, D	0	125 AC	3-20 A	2, 3	1	2.0 kA, C1
		B, D	0	250 AC	3-20 A	2, 3	1	1.0 kA, C1
		A, B, D	0	50 DC	3-20 A	2, 3	1	1.0 kA, U1
SS-001-C, SS-001-T, SS-001R	OC	A, B, D	0	125 AC	2-20 A	2	1	2.0 kA, C1
	OC	B, D	0	250 AC	2-20 A	2	1	1.0 kA, C1
	OC	A, B, D	0	32 DC	3-16 A	2	1	1.0 kA, C1
SS-005	OC	A, B, C, D	0	125 AC	4-20 A	2	1	1.0 kA, C1
	OC	A, B, C, D	0	250 AC	4-20 A	2	1	1.0 kA, C1
	OC	A, B, C, D	0	50 DC	4-20 A	2	1	1.0 kA, C1
SS-006	OC	A, B, D	0	125 AC	4-16 A	2	1	1.0 kA, C1
	OC	B, D	0	250 AC	4-16 A	2	1	1.0 kA, C1
	OC	A, B, D	0	32 DC	4-16 A	2	0	1.0 kA, C1
SS-007	OC	A, B, D	0	125 ac	3-20	2	1	1KA, C1
		B, D	0	250 ac	3-20	2	1	1KA, C1
		A, B, D	0	32 dc	3-20	2	0	1KA, C1

Marking: Company name, catalog designation, date code and Recognized Component Mark for Canada, .
 Last Updated on 2015-06-01

[Questions?](#)

[Print this page](#)

[Terms of Use](#)

[Page Top](#)

© 2017 UL LLC

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2017 UL LLC".